

Gluefast

Adhesives & Applying Equipment

The "PAT" Pneumatic Adhesive Tank

Portable, versatile and efficient. Our Pneumatic Adhesive Tank (PAT) is the fast, economical way to apply adhesive for case and carton sealing, palletizing loads or performing just about any gluing operation you'll ever need. PAT is completely portable so you just bring it to the item to be glued. There's no need to waste valuable time by relocating items to a glue station.

PAT is totally self-contained, complete with stainless-steel tank, pressure gauge and regulator, hand grips, nylon hose and safety relief valve. PAT is simple to use and easy to handle. Just fill the tank with adhesive and air (10-50 psi) and you're ready to dispense adhesive with the controlled amounts you desire. Interchangeable glue heads apply uniform stripes of adhesive ¼" apart. Optional glue-control needle-valve recommended when PAT is not connected to an air supply.


New! Optional sprayer attachment. Now your PAT can cover more area faster with our new PAT Sprayer. The Sprayer allows you to apply a fine, uniform mist, resulting in adhesive savings and faster setting times. You can also apply a heavy film of adhesive. For the same applications as the regular PAT plus some labeling applications. Requires 50 psi @ 5 cfm.

Standard features:

- Stainless steel tank
- Pressure gauge & regulator
- Safety relief valve
- Nylon hose, handle, push button glue valve

Optional features:

- 1", 2", 3", 6" or 8" wide glue heads
- Glue heads for applying a dot or line of adhesive
- Glue control needle valve
- New optional sprayer attachment

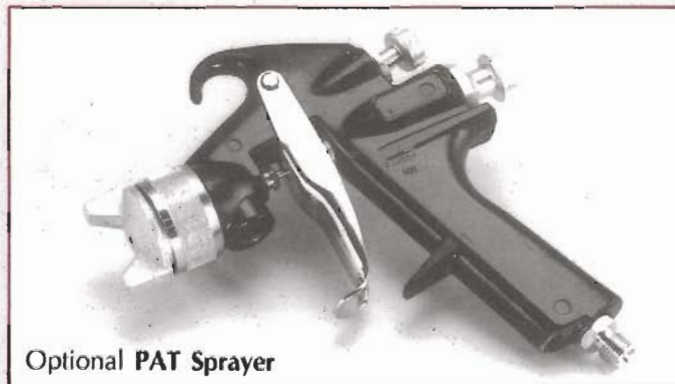

Optional PAT Sprayer



PAT shown with interchangeable glue heads

The PAT Specifications

MODEL	NET WEIGHT lbs. ¹	GLUE CAPACITY		BENCH/FLOOR SPACE REQUIREMENT ²
		gallons	liters	
3 PAT	9	3	11.4	8.25"
5 PAT	10.5	5	21.2	8.25"
10 PAT	20.5	10	42.4	12.5"

¹ Excludes glue head. PAT Sprayer System weighs 2.5 pounds more (spray gun weighs 1.5 lbs.)

² The tank is round. Figure given is the diameter of tank.

Guide to Glue-Fast's Carton Sealing & Palletizing Adhesives

ADHESIVE NUMBER	TYPE	UNCOATED CARTONS	COATED CARTONS			OPEN TIME ¹				SETTING TIME ¹			RECOMMENDED APPLICATING EQUIPMENT
			None	Some	Most	10-15 Sec.	Less Than 1 Min.	1 Min. +	2-5 Min.	2-10 Sec.	Less Than 1 Min.	2 Min.	

SEALING

1065	DEXTRIN	●	●						●			●	MULTI-STRIPE* PAT PAT SPRAYER
136	RESIN	●		●					●			●	MULTI-STRIPE* PAT PAT SPRAYER
1011	HOT-MELT	●			●	●					●		HOT-MELT GUN**

PALLETIZING

ADHESIVE	FOR UNITIZING	RECOMMENDED APPLICATING EQUIPMENT
SKID-LOCK®	CARTONS, MULTIWALL PAPER BAGS	MULTISTRIPE*, P.A.T., SKID-LOCK AUTO APPLICATOR
SL-POLY-ONE	PLASTIC BAGS, SHRINK-WRAPPED ITEMS	P.A.T. SPRAYER, SKID-LOCK AUTO APPLICATOR

* Applies adhesive using a flexible pint or quart plastic bottle. Available with 2-, 4- or 8 applying heads. Uses cold water-based adhesives.

** Uses bulk loading hot-melt for case and carton sealing, palletizing, product assembly. Adhesive savings up to 50% over "slug" or "candle" type guns.

¹ Open time and setting time varies depending upon carton strength and amount of adhesive applied.

NOTE: This guide serves as a recommendation only. Final suitability of product must be determined by the user.